

Maxwell Road, Stevenage  
Hertfordshire  
SG1 2EW, UK

T: +44(0) 1438 777 700  
F: +44(0) 1438 777 800  
E: [info@fira.co.uk](mailto:info@fira.co.uk)  
W: [www.fira.co.uk](http://www.fira.co.uk)

## Pelma Spa

Produzione Polluretano Espanso  
Via Mazzini 500  
25020 Bassano Bresciano (bs)  
Italy

Our Ref: **TFFLF76318**

Date: 31 October 2017

Delivery Date: 18 October 2017

Test Dates: 18 – 30 October 2017

For the attention of Alberto Cividati

## SAMPLE(S) FOR TEST:

One, Foam – Ref: 50vecmag

*Note: The above descriptions are as supplied by the client and have not been verified by FIRA who can take no responsibility for the accuracy of the description.*

## TEST REQUIREMENTS:

Schedule 1 Part I (based on BS 5852: 1982 Part 2)

## RESULT:

Pass - P5

FIRA is a UKAS TESTING Laboratory No. 0174

Tests marked "Not UKAS Accredited" in this Report are not included in the UKAS Accreditation Schedule for our laboratory.

Technical report references marked \* indicate this report is supplementary to the previous report with the same reference.

Opinions and interpretations expressed herein are outside the scope of UKAS Accreditation.

This Report relates to the sample(s) submitted for test and no others. Additions, deletions or alterations are not permitted.

Test reports are given to the client in confidence, and may only be reproduced in whole or in part with written permission from FIRA International Limited. Note that the words "**tested by FIRA**" may be used in subsequent publicity for the product; "approved" must **not** be used.


Tests are carried out on the understanding that neither FIRA International Limited nor its officers can accept any legal responsibility for information or advice given or opinions expressed whether in response to specific enquiries or otherwise. This Report is given subject to the Terms of Business of FIRA International Limited which are available at [www.fira.co.uk/document/fira-terms-and-conditions.pdf](http://www.fira.co.uk/document/fira-terms-and-conditions.pdf)



# TECHNICAL REPORT

## DESCRIPTION

Enquiry No. TFFLF76318  
 Item: Foam – Ref: 50vecmag  
 Supplied by: Pelma Spa

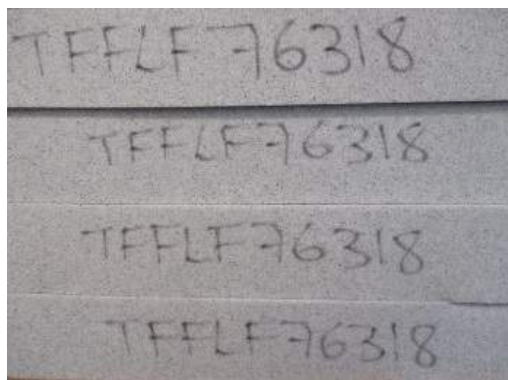

*The following test results relate only to the ignitability of the combination of materials under the particular conditions of test; they are not intended as a means of assessing the full potential fire hazard of the materials in use.*

### **FURNITURE AND FURNISHINGS (FIRE) (SAFETY) REGULATIONS 1988 - AMENDED 1989, 1993 AND 2010 SCHEDULE 1 PART 1 FOR POLYURETHANE FOAM (BASED ON BS 5852: 1982 PART 2)**

**Initial Inspection:** Condition as new.  
**Conditioning:** ≥3 days at indoor ambient conditions and ≥16 hours at 20±5°C & 50±20% rh.

**Test Procedure:** Test rig - as specified in 6.1.1 of BS 5852-2: 1982, foam sample and covered with a FR polyester material as specified in paragraph 2 of Schedule 1 Part 1 of the above regulations (as amended).

**Test Conditions:** The test was conducted within the specified conditions of 15-30°C & 20-70% rh.

## RESULTS

Ignition Source No.	App No.	Flaming of Assembly	Smoke/ Smoulder	Result - Ignition/Non-Ignition
5	1	05min 31sec	10min 00sec	PASS N/I
	2	05min 44sec	10min 00sec	PASS N/I

Application	Initial Weight (kg)	Final Weight (kg)	Total Mass Loss (kg)
1	7.325	7.286	0.039
2	7.310	7.269	0.031

## COMMENTS

CLAUSE	SMOULDERING CRITERIA	App 1.	App 2.
4.1b	Smoke/ smoulder >than 60min after ignition of crib	NO - PASS N/I	NO - PASS N/I
4.1c	Unsafe escalating combustion	NO - PASS N/I	NO - PASS N/I
4.1d	Test assembly consumed	NO - PASS N/I	NO - PASS N/I
4.1e*	Smoulders to either side of the lower margins or through full thickness	NO - PASS N/I	NO - PASS N/I
4.1f*	Charring/ other than discolouration extending more than 100mm, other than upwards from position of the crib	NO - PASS N/I	NO - PASS N/I
CLAUSE	FLAMING CRITERIA	App 1.	App 2.
4.2b	Flaming >10 min from ignition of crib	NO - PASS N/I	NO - PASS N/I
4.2d	Unsafe escalating combustion	NO - PASS N/I	NO - PASS N/I
4.2e	Test assembly consumed	NO - PASS N/I	NO - PASS N/I
4.2f*	Flames through full thickness/ flames reach lower margin	NO - PASS N/I	NO - PASS N/I

## CONCLUSION

On the basis of the test carried out this polyurethane slab foam Ref: 50vecmag, passes the flammability performance requirements of the test specified in Schedule 1 Part I of the Furniture and Furnishings (Fire) (Safety) Regulations 1988, amended 1989, 1993 and 2010.

Tested by: Barry Worrell  
 Reported by: Nathaly Da Silva

Approved by: Howard James  
 Operations Manager - Testing

\*\*\*\*\* End of Report \*\*\*\*\*

TFFLF76318  
 Page 2 of 2

